
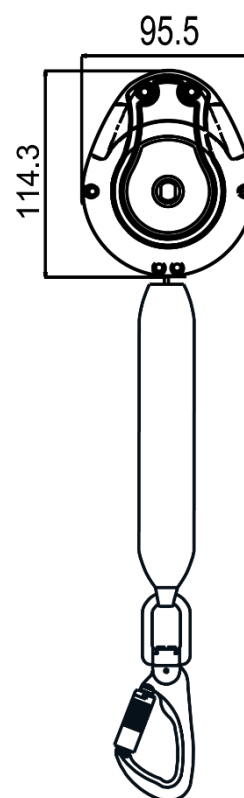



Olympic-S



HS CODE
8479 89 97
CARTON SIZE / PCS.
60 x 40 x 24 cm / 16
AET N° I E
(in progress)
MODULE D IN14/14003
SGS United Kingdom Ltd., N°0120 Unit 202B, Worle Parkway, Weston-super-Mare, BS22 6WA, United Kingdom

REF.	FA 20 503 01
 LG. KG	1.75 m ----- MAX. 100 KG
CE	EN 360:2002
 MAT.	Polyamide 6 - 30% fiber glass Aramid 21 mm
	 FA 50 224 18 / FA 50 221 17
	x2
R(kN)	15 kN
	YES – DOUBLE SHARP EDGE (R>0.5 mm)
+	DIN 19427
	0.77 KG

 LG. KG Longueur Poids maxi utilisateur Length Max. user weight Longitud Peso máximo del usuario Lunghezza Peso Max. dell'utente Länge Höchstgewicht des Benutzers	 MAT. Matière carter / sangle Material of casing / webbing Material cárter / correa Material dei carter / Cinghia Material Gehäuse / Gurt	 Matière connecteur haut / connecteur bas Material of top connector / bottom connector Material conector alto / conector bajo Materiale connettore alto / connettore basso Material oberes / unteres Verbindungselement
 Nombre d'émerillons Number of swivels Cantidad de eslabones giratorios Numero di tornichetti Anzahl der Wirbel	 Homologué pour le travail à proximité d'arêtes vives Approved for work near sharp edges Homologado para trabajo cerca de aristas vivas Omologato per lavoro in prossimità di spigoli vivi Zugelassen für Arbeiten in der Nähe scharfer Kanten	